


Dyson backplate technical specification



HU
03

Front elevation

All dimensions shown in mm (+/-5 mm)
Not to scale

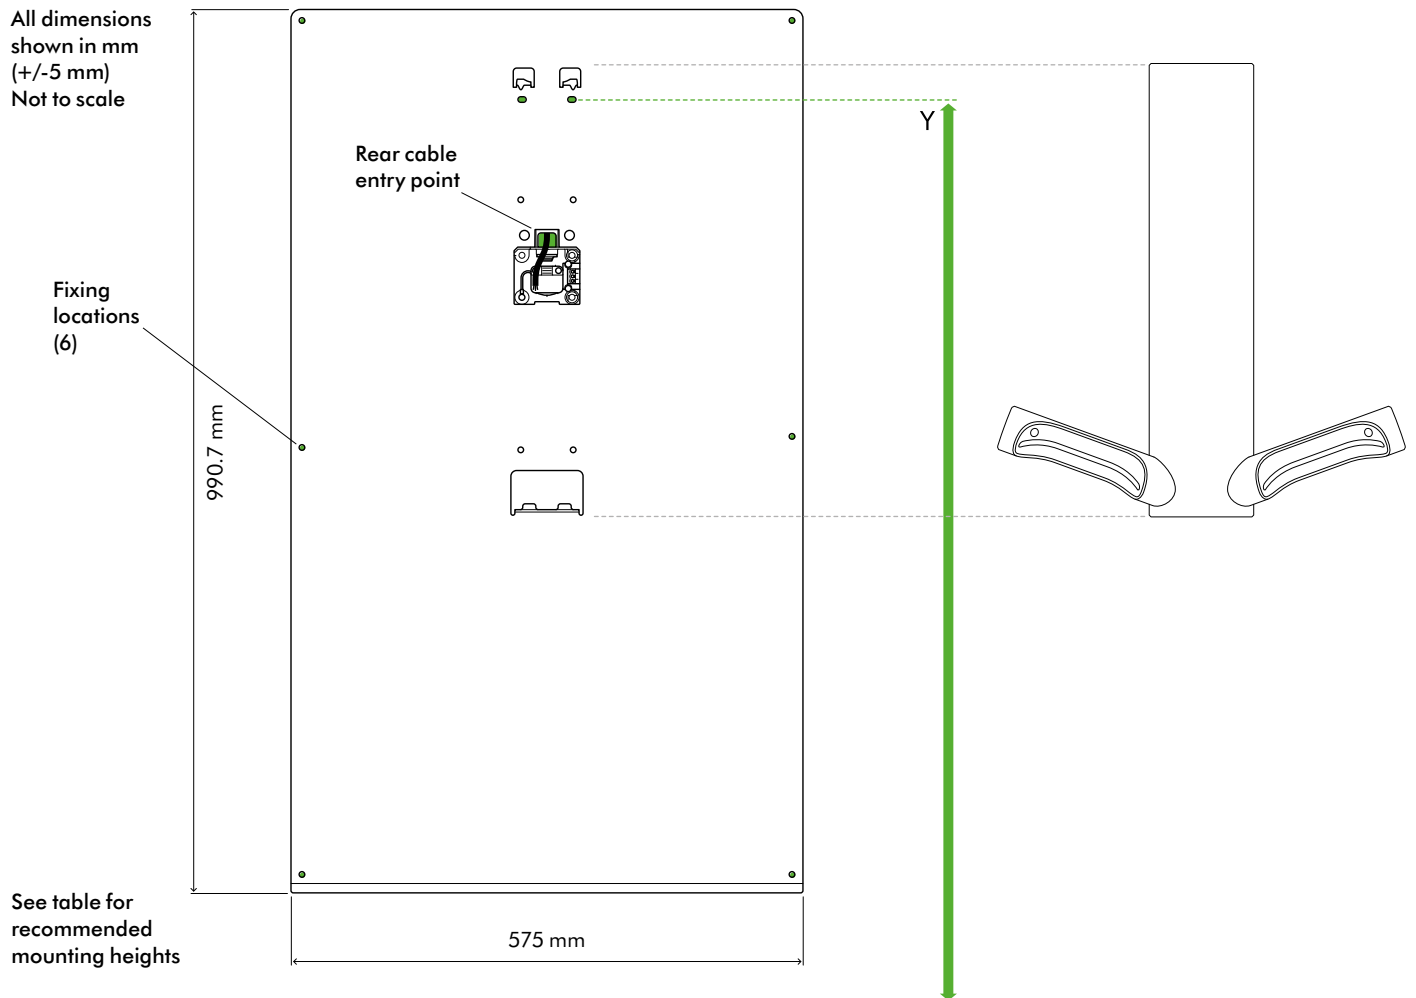

See table for recommended mounting heights

Recommended installation heights from floor		Minimum clearance above machine	
Male	Y 1451 mm		210 mm
Female	Y 1416 mm		
Wheelchair user	Y 1207 mm		
Child 5-8	Y 1079 mm		
Child 8-11	Y 1179 mm		
Child 11-14	Y 1256 mm		
Dyson backplate dimensions		Rear cable entry point from floor	
Height 991 mm Width 575 mm Depth 5 mm		Male	1293 mm
		Female	1258 mm
		Wheelchair user	1049 mm
		Child 5-8	921 mm
		Child 8-11	1021 mm
		Child 11-14	1098 mm

Kontaktieren Sie uns für weitere Informationen
00800 777 55 777 (gebührenfrei aus Europa)
info@cleantec.eu
dysonairblade.eu

HU
03

Installing the Dyson backplate

Where only unsupported plasterboard is available for installation, a Dyson backplate must be used. Fixing to unsupported plasterboard (drywall) without the aid of a Dyson backplate will not result in safe and secure installation for your machine, and may also invalidate your guarantee.

If the wall you are fixing the machine to has an airgap, the fixings used must be of a sufficient length to provide a secure installation. Do not use sealant when attaching the machine to the wall.

The Dyson backplate helps protect the wall from water damage and can be used to cover holes/marks left from previously installed products – including the Dyson Airblade dB hand dryer.

Contact the Dyson Helpline for further information.

Construction

Stainless steel (brushed)

Back plate mounting bracket: Stainless steel – Brushed (304L)

Logistics

Net weight: 6.7 kg / 14.7 lbs

Packaged weight: 11.10 kg / 24.47 lbs

Packaged dimensions:

(H) 71 × (W) 664 × (D) 1295 mm

Standard guarantee

5 year guarantee



Kontaktieren Sie uns für weitere Informationen

00800 777 55 777 (gebührenfrei aus Europa)

info@cleantec.eu

dysonairblade.eu